



A close-up, grayscale photograph of industrial valve fittings, showing various threaded and flanged components. The image is partially obscured by a large black diagonal shape that covers most of the page.

Beschläge für die  
Ventilmontage

**FITTINGS FOR  
VALVES MOUNTING**



TYPE  
**OCN**



TYPE  
**ODO**



TYPE  
**OC**



TYPE  
**OM**



TYPE  
**OL**



TYPE  
**OXL**

## FITTINGS FOR DIN 2353 VALVES SERIES

### USE AND OPERATION:

Fittings for  $\varnothing$  12 or  $\varnothing$  15 mm pipes, adjustable at 360°; they are used on DIN 2353 valve series for direct mounting on the cylinder.

### MATERIALS AND FEATURES:

Material: zinc. plated steel  
Working pressure: 350 Bar ( 12L)- 280 Bar ( 15L)  
Maximum pressure: 1000 Bar ( 12L)- 780 Bar (15L)

### APPLICATIONS:


Once obtained the desired centre distance, put the pipe into the valve's port and connect the fitting to the cylinder through the screw.

### A RICHIESTA:

- specific centre distance (specify CODE/M with the desired mm length)


**SHORT BANJO**

CODE	TYPE	L mm	ØC mm	ØV mm	H mm	WEIGHT Kg.
<b>R1150</b>	OC 1/4"	38	13,3	12	14,5	0,036
<b>R1160</b>	OC 3/8"	40	17	12	17	0,044
<b>R1170</b>	OC 1/2"	44	21,2	15	22	0,088
<b>R1190</b>	OC 18	42	18,3	12	20	0,066



**MEDIUM BANJO**


CODE	TYPE	L mm	ØC mm	ØV mm	H mm	WEIGHT Kg.
<b>R1200</b>	OM 1/4"	112	13,3	12	14,5	0,072
<b>R1210</b>	OM 3/8"	106	17	12	17	0,072
<b>R1220</b>	OM 1/2"	109	21,2	15	22	0,126
<b>R1230</b>	OM 18	107	18,3	12	20	0,094

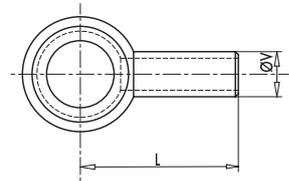

**LONG BANJO**


CODE	TYPE	L mm	ØC mm	ØV mm	H mm	WEIGHT Kg.
<b>R1240</b>	OL 1/4"	205	13,3	12	14,5	0,106
<b>R1250</b>	OL 3/8"	199	17	12	17	0,110
<b>R1260</b>	OL 1/2"	202	21,2	15	22	0,176
<b>R1270</b>	OL 18	200	18,3	12	20	0,134

**OCCHIO MEDIO-LUNGO-EX.LUNGO**  
 MEDIUM - LONG - EXTRA LONG BANJO




**EXTRA LONG BANJO**

CODE	TYPE	L mm	ØC mm	ØV mm	H mm	WEIGHT Kg.
<b>R1241</b>	OXL 300 1/4"	305	13,3	12	14,5	0,15
<b>R1271</b>	OXL 300 3/8"	300	17	12	17	0,15
<b>R1242</b>	OXL 400 1/4"	405	13,3	12	14,5	0,19
<b>R1272</b>	OXL 400 3/8"	400	17	12	17	0,18
<b>R1243</b>	OXL 500 1/4"	505	13,3	12	14,5	0,23
<b>R1273</b>	OXL 500 3/8"	500	17	12	17	0,22

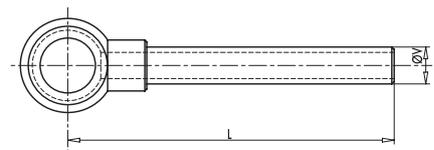


**CONICAL BANJO**

CODE	TYPE	V gas conica	L mm	ØC mm	WEIGHT Kg.
<b>R1320</b>	OCN 1/4"	G 1/4"	14	13,3	0,03
<b>R1330</b>	OCN 3/8"	G 3/8"	16	17	0,04
<b>R1340</b>	OCN 1/2"	G 1/2"	21	21,2	0,10

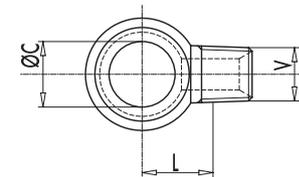

**BANJO WITH NUT AND OLIVE**

CODE	TYPE	ØC mm	ØV mm	L mm	E mm	WEIGHT Kg.
<b>R1280</b>	ODO 1/4" X 12L	13,3	12	43,5	22	0,07
<b>R1290</b>	ODO 3/8" X 12L	17	12	38,5	22	0,07
<b>R1300</b>	ODO 1/2" X 15L	21,2	15	44,5	27	0,14
<b>R1310</b>	ODO 18" X 12L	18,3	12	41	22	0,09

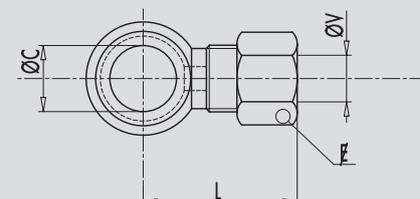

TYPE  
**VF**



TYPE  
**NDO**



TYPE  
**ND**



TYPE  
**NDG**



## DIFFERENT FITTINGS

**USE AND OPERATION:**


Fittings for valve mounting.

**MATERIALS AND FEATURES:**

Material: zinc-plated steel


**HOLED SCREW**

CODE	TYPE	CLOSING COUPLE Nm	C GAS-MET	L m	L1 mm	E mm	WEIGHT Kg.
<b>R1350</b>	VF 1/4"	55	G 1/4"	28	34	19	0,04
<b>R1360</b>	VF 3/8"	70	G 3/8"	31	39	22	0,05
<b>R1370</b>	VF 1/2"	85	G 1/2"	38	46	27	0,08
<b>R1390</b>	VF 14	60	M14X1,5	27	33,5	19	0,03
<b>R1380</b>	VF 18	75	M18X1,5	36	44	24	0,06

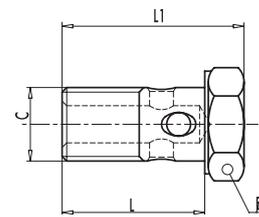


**NIPPLE WITH NUT AND OLIVE**

CODE	TYPE	C GAS	ØV mm	L1 mm	L2 mm	E mm	WEIGHT Kg.
<b>R1120</b>	NDO 1/4"X12L	G1/4"	12	11	28	22	0,06
<b>R1110</b>	NDO 3/8"X12L	G3/8"	12	13	28	22	0,06
<b>R1130</b>	NDO 1/2"X12L	G1/2"	12	13	32	22	0,10
<b>R1140</b>	NDO 1/2"X15L	G1/2"	15	13	34	27	0,12

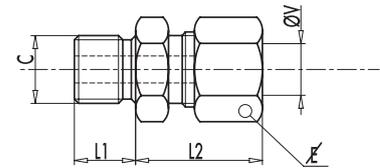

**DOUBLE NIPPLE**

CODE	TYPE	C GAS	L mm	L1 mm	E mm	WEIGHT Kg.
<b>R1125</b>	ND 1/4"X 1/4	G1/4"	29	11	19	0,03
<b>R1115</b>	ND 3/8"X 3/8	G3/8"	33	13	22	0,05
<b>R1135</b>	ND 1/2"X 1/2	G1/2"	38	15	27	0,07

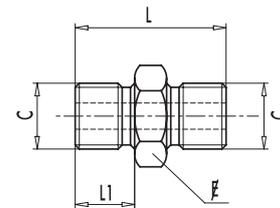

**NIPPLE WITH ROTARY NUT**

CODE	TYPE	C-V GAS	L1 mm	L2 mm	E mm	WEIGHT Kg.
<b>R1142</b>	NDG 3/8"	G 3/8"	13	33	22	0,04
<b>R1144</b>	NDG 1/2"	G 1/2"	14	37	27	0,07
<b>R1146</b>	NDG 3/4"	G 3/4"	16	52	32	0,11

