


TYPE
VBPDE

HYDRAULIC DIAGRAM

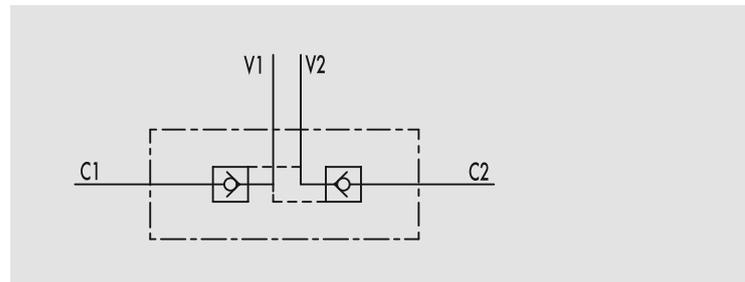

DOUBLE PILOT OPERATED CHECK VALVES

USE AND OPERATION:

Pilot check valves are used to block the cylinder in both directions. Flow is free in one direction and blocked in the reverse direction until pilot pressure is applied.

MATERIALS AND FEATURES:

Body: zinc-plated steel.
Internal parts: hardened and ground steel.
Seals: BUNA N standard
Poppet type: any leakage.

APPLICATIONS:



Connect V1 and V2 to the pressure flow and C1 and C2 to the actuator.

ON REQUEST


- without seal on pilot piston
- 1 Bar spring
- 8 Bar spring

PRESSURE DROPS CURVE

Oil temperature: 50° C - Oil viscosity: 30 cSt

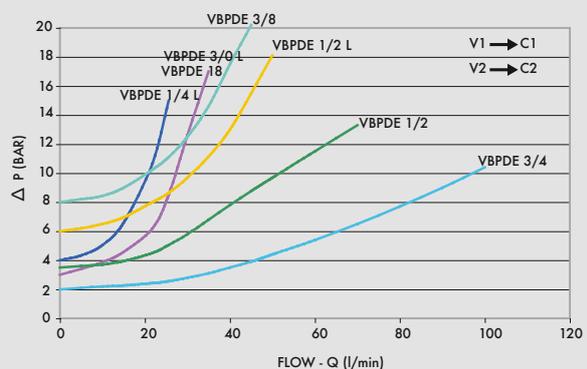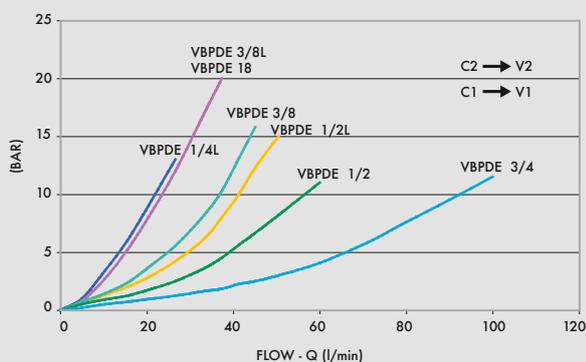

CODE	TYPE	PILOT RATIO	MAX FLOW Lt. / min	MAX PRESSURE Bar	CRACKING PRESSURE Bar
V0010	VBPDE 1/4" L	1:5,5	20	350	4
V0020	VBPDE 3/8" L	1:5,5	35	350	3
V0030	VBPDE 1/2" L	1:5	50	350	6
V0050	VBPDE 3/8 "	1:5	45	350	8
V0061	VBPDE 18 L	1:5,5	20	350	4
V0070	VBPDE 1/2"	1:4	70	350	3,5
V0040	VBPDE 3/4"	1:4	100	300	2

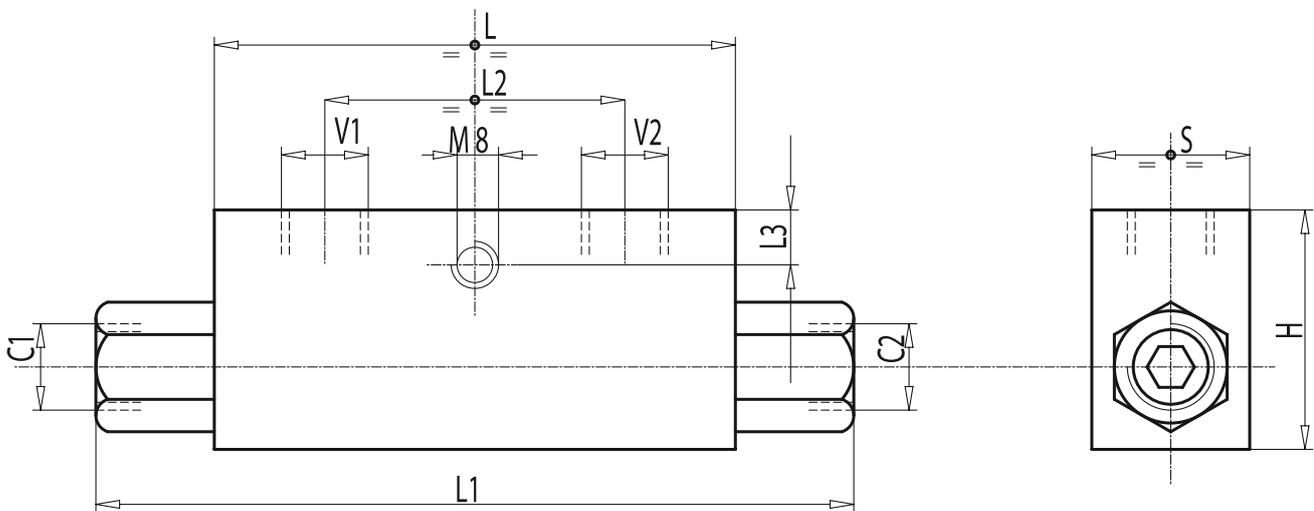

CODE	TYPE	V1 - V2 C1 - C2 GAS - MET	L mm	L1 mm	L2 mm	L3 mm	H mm	S mm	WEIGHT kg
V0010	VBPDE 1/4"L	G 1/4"	64	113	36	8	40	30	0,636
V0020	VBPDE 3/8"L	G 3/8"	80	128	38	8	40	30	0,736
V0030	VBPDE 1/2" L	G 1/2"	90	142	45	12,5	45	35	1,042
V0050	VBPDE 3/8 "	G 3/8"	90	156	45	12,5	45	35	1,174
V0061	VBPDE 18 L	M18X1,5	68	118	38	8	40	30	0,630
V0070	VBPDE 1/2"	G 1/2"	80	144	40	18	60	35	1,284
V0040	VBPDE 3/4"	G 3/4"	100	192	46	12	60	40	1,916